

# BE 159: Signal Transduction and Mechanics in Morphogenesis

Justin Bois

Caltech

Winter, 2019

**Caltech**



Donna and Benjamin M.

**Rosen Bioengineering Center**

This document was prepared at Caltech with financial support from the Donna and Benjamin M.  
Rosen Bioengineering Center.

© 2019 Justin Bois, except for selected figures, with citations noted.  
This work is licensed under a [Creative Commons Attribution License CC-BY 4.0](https://creativecommons.org/licenses/by/4.0/).

## 10 Continuum mechanics II: conservation of momentum

### 10.1 Conservation of linear momentum

Recall the general conservation law,

$$\partial_t \xi = -\partial_i j_i. \quad (10.1)$$

Let's take  $\xi = \rho v_i$ , the linear momentum density. The total linear momentum of a volume element is  $\int dV \rho v_i$ , so taking  $\xi = \rho v_i$  means that we are describing a conservation law for linear momentum. In this case,  $\partial_t(\rho v_i)$  is a rank one tensor, so the flux must be a rank two tensor. We will denote this flux as  $\Sigma_{ij}$ , the **total momentum flux tensor**. It is the flux of momentum density coming out of a volume element. The statement of conservation of linear momentum, called the equation of motion, is

$$\partial_t \rho v_i = -\partial_j \Sigma_{ij}. \quad (10.2)$$

We can split the total momentum flux tensor into two pieces. First, we have the momentum flux due to material flowing in and out of the volume element. This is  $\rho v_i v_j$ . The second part of the total momentum flux is all the other stuff, which we will denote by  $\sigma_{ij}$ . This object,  $\sigma_{ij}$ , is called the **stress tensor**.

$$\Sigma_{ij} = \rho v_i v_j + \sigma_{ij}. \quad (10.3)$$

To be clear, the stress tensor contains all stresses suffered by a material, such as pressure and shear stresses. The other part of the total momentum flux tensor is momentum density that is transported by virtue of material moving in and out of the volume element. Using this split total momentum tensor, we have

$$\partial_t \rho v_i = -\partial_j \rho v_i v_j - \partial_j \sigma_{ij}. \quad (10.4)$$

Applying the chain rule to terms on both sides of this equation gives

$$\rho \partial_t v_i + v_i \partial_t \rho = -\rho v_j \partial_j v_i - v_i \partial_j \rho v_j - \partial_j \sigma_{ij}. \quad (10.5)$$

Rearranging, we get

$$\rho (\partial_t + v_j \partial_j) v_i = -v_i [\partial_t \rho + \partial_j \rho v_j] - \partial_j \sigma_{ij}. \quad (10.6)$$

The parenthetical term on the left hand side is the material derivative. The bracketed term is zero by conservation of mass, cf. equation (9.22). Thus, we arrive at our statement of conservation of linear momentum.

$$\rho \frac{dv_i}{dt} = -\partial_j \sigma_{ij}. \quad (10.7)$$

## 10.2 Physical interpretation of the stress tensor

The stress tensor describes forces resulting from relative motion of a material. It has units of force per area, or momentum flux. To see this, note that momentum has dimension of  $ML/T$ . A flux introduces dimension of  $1/L^2T$ . Putting it together, the stress has units of  $M/LT^2$ , or force per area.

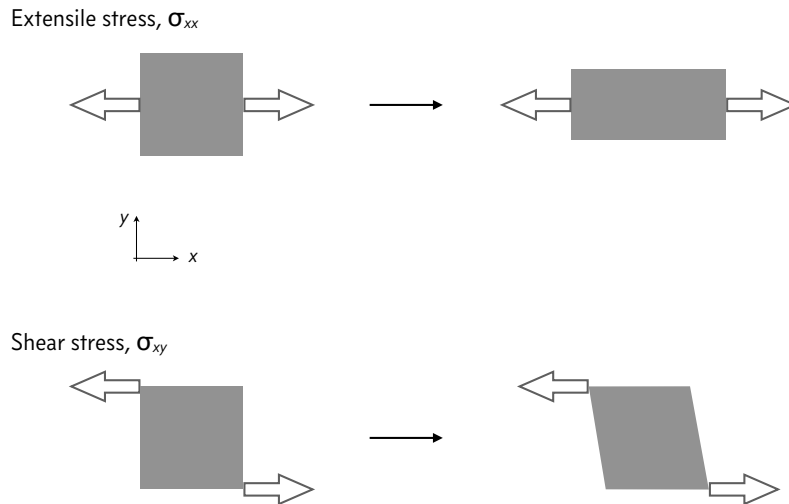


Figure 13: Depiction of extensile and shear stresses on a block of material.

To understand how it describes forces due to relative motion consider grabbing a piece of material and stretching it, as in the top illustration in Fig. 13. The part of the material to the left moves leftward and that to the right moves rightward. The component of the stress tensor describing resistance to this mode of relative motion is  $\sigma_{xx}$ .

Now consider a shearing motion, as in the bottom illustration in Fig. 13. The component of the stress tensor describing resistance to this mode of relative motion is  $\sigma_{xy}$ .

## 10.3 Constitutive relations

This is all fine and good, but can we write a mathematical expression for  $\sigma_{ij}$  so that we can put it to use? An expression for the stress tensor is called a **constitutive relation**. A constitutive relation relates physical quantities in a material-specific way. We already saw a constitutive relation in the last lecture, Fick's first law, which relates diffusive mass flux to a concentration gradient,  $j_i^k = -M^k D^k \partial_i c^k$ .

We stated Fick's first law without proof, and the derivations constitutive relations are often nontrivial. We will explore constitutive relations in the this and the next lecture and explore their meanings.

## 10.4 Constitutive relation for a homogeneous elastic solid

We first consider a homogeneous elastic solid. The stress tensor is given in terms in the **strain** tensor, which we will first characterize. Throughout the following discussion, bear in mind that we are talking about a *homogeneous* solid. This means that deforming the solid in the  $x$ -direction should be the same as deforming it in the  $y$ -direction.

### 10.4.1 Elastic strain tensor

We define by  $x_i$  the position of a piece of the solid in space. We then deform the solid such that that same piece is now at position  $x'_i$ . We define the **displacement**,  $u_i = x'_i - x_i$ . If  $u_i$  is constant across the solid, the solid is not being deformed; rather, it is being translated in the direction of  $u_i$ . However, if  $u_i$  varies in space, we do have a deformation. So, the quantity  $\partial_i u_j$  reflects local deformations in the solid.

To investigate the magnitude of deformations, we consider the differential squared distance between neighboring points in the solid.

$$d\ell^2 = dx_i dx_i. \quad (10.8)$$

If we have a deformation, this distance changes by

$$d\ell'^2 = dx'_i dx'_i. \quad (10.9)$$

To get an expression for  $dx'_i$ , we can use the chain rule.

$$d(x'_i - x_i) = du_i = (\partial_j u_i) dx_j, \quad (10.10)$$

which gives

$$dx'_i = dx_i + (\partial_j u_i) dx_j. \quad (10.11)$$

Then, we have

$$\begin{aligned} d\ell'^2 &= (dx_i + (\partial_j u_i) dx_j) (dx_i + (\partial_k u_i) dx_k) \\ &= dx_i dx_i + (\partial_j u_i) dx_j dx_i + (\partial_k u_i) dx_k dx_i + (\partial_j u_i) (\partial_k u_i) dx_j dx_k \\ &= d\ell^2 + [\partial_i u_j + \partial_j u_i + (\partial_i u_k) (\partial_j u_k)] dx_i dx_j, \end{aligned} \quad (10.12)$$

where in the last line we have renamed indices to collect terms multiplying  $dx_i dx_j$ . We can write this down as

$$d\ell'^2 - d\ell^2 = 2 \varepsilon_{ij} dx_i dx_j, \quad (10.13)$$

where we have defined the **strain tensor**<sup>9</sup> as

$$\varepsilon_{ij} = \frac{1}{2} (\partial_i u_j + \partial_j u_i + (\partial_i u_k)(\partial_j u_k)). \quad (10.14)$$

Because it goes as the square of the differential displacement, the last term in the strain tensor is small for small displacements. So we have, to linear order in  $\partial_i u_i$ ,

$$\varepsilon_{ij} \approx \frac{1}{2} (\partial_i u_j + \partial_j u_i). \quad (10.15)$$

#### 10.4.2 Elastic stress tensor

We have established that the strain describes deformations of the solid. We can derive a relationship between the stress tensor, which describes the forces necessary to achieve the deformations, and the strain tensor using thermodynamic arguments. Instead, we will just start with Hooke's law, which is valid for small deformations. As Hooke said, "*ut tensio sic vis*," or the force is proportional to extension. Because the stress tensor is a rank 2 tensor, as is the strain tensor, to write a linear relationship between the two, most generally, we need a rank 4 tensor.

$$\sigma_{ij} = C_{ijkl} \varepsilon_{kl}. \quad (10.16)$$

There are  $3^4 = 81$  entries in the tensor  $C_{ijkl}$ . This looks really intimidating, but by symmetry arguments, we can show that the entries are not all independent. For example, because the strain tensor  $\varepsilon_{ij}$  is symmetric,  $\varepsilon_{ij} = \varepsilon_{ji}$ . The stress tensor must also show this symmetry, so therefore so must  $C_{ijkl}$ . This implies that  $C_{ijkl} = C_{jikl} = C_{ijlk}$ . We will not go through all of the symmetry arguments here, but in the end, we find that there are only two independent parameters. Generally, it can be shown that a linear relationship between two rank 2 symmetric tensors that remains invariant under change of coordinates has the form

$$\sigma_{ij} = \lambda \varepsilon_{kk} \delta_{ij} + 2\mu \varepsilon_{ij}, \quad (10.17)$$

where the constants  $\lambda$  and  $\mu$  are called the **Lamé coefficients**. This gives us our constitutive relation for an elastic solid.

As is commonly done, it is convenient to write the Lamé coefficients in a different form. We define

$$\lambda = \frac{E\nu}{(1+\nu)(1-2\nu)}, \quad (10.18)$$

$$\mu = \frac{E}{2(1+\nu)}, \quad (10.19)$$

---

<sup>9</sup>Though they have similar symbols, this strain tensor  $\varepsilon_{ij}$  is not to be confused with the Levi-Civita symbol  $\varepsilon_{ijk}$ .

where  $E$  is called the Young's modulus and  $\nu$  is the Poisson ratio.<sup>10</sup> The resulting expression for the stress tensor is

$$\sigma_{ij} = \frac{E}{1 + \nu} \left( \varepsilon_{ij} + \frac{\nu}{1 - 2\nu} \varepsilon_{kk} \delta_{ij} \right), \quad (10.20)$$

We will not derive it here, but the second law of thermodynamics dictates that  $E \geq 0$  and  $-1 \leq \nu \leq 1/2$ . Thus, the stress associated with an elastic deformation is of order  $E \varepsilon$ .

### 10.4.3 Equation of motion for an elastic solid

Now that we have our constitutive relation, we can write the equation of motion from the statement of conservation of linear momentum. The local velocity,  $v_i$ , is related to the displacement as  $v_i = \partial_t u_i$ . Thus, we can write

$$\rho \frac{dv_i}{dt} = \rho \left( \partial_t^2 u_i + (\partial_t u_j) \partial_j \partial_t u_i \right) = -\partial_j \sigma_{ij}, \quad (10.21)$$

where the  $t$ 's denote time derivatives and are not summed over. Evidently, this is a wave equation in the displacement. The dynamics describe elastic waves through the solid. We know these waves as sound. The dynamics are usually very fast compared to biological time scales of interest, so we usually neglect the left hand side of the equation of motion. Typically with elastic solids, we will study only statics, as governed by the constitutive relation itself, in this case, equation (10.20).

## 10.5 Constitutive relation for an isotropic viscous fluid

If we look at the expression for the elastic stress, we see that it scales like the displacement,  $\sigma \sim E \varepsilon$ . For a fluid, we would not expect this to be the case. If we displace a fluid and then let it rest, we do not have to exert any more force to maintain the displacement. Instead, we expect that the stress we need to exert on a fluid to move it will be related to the *rate* at which we make deformations,

$$\partial_t \partial_i u_j = \partial_i \partial_t u_j = \partial_i v_j, \quad (10.22)$$

where  $v_j = \partial_t u_j$  is the velocity at which the material is moving. In other words, if we want to move a fluid more rapidly, it will require more force than to move it slowly. The actual magnitude of the displacement will not matter; only the rate at which we make displacements. The **velocity gradient tensor** can be written as

$$\partial_i v_j = \frac{1}{2} (\partial_i v_j + \partial_j v_i) + \frac{1}{2} (\partial_i v_j - \partial_j v_i) = v_{ij} + \omega_{ij}. \quad (10.23)$$

---

<sup>10</sup>There should be no confusion between the Poisson ration  $\nu$  and the stoichiometric coefficient for species  $k$  in chemical reaction  $l$ ,  $\nu_{il}^k$ .

Here, we have defined

$$v_{ij} \equiv \frac{1}{2}(\partial_i v_j + \partial_j v_i) \quad (10.24)$$

as the symmetric part of the velocity gradient tensor and

$$\omega_{ij} \equiv \frac{1}{2}(\partial_i v_j - \partial_j v_i) \quad (10.25)$$

as the antisymmetric part. Due to the symmetry of an isotropic fluid and conservation of angular momentum (which we will not formally consider here), the stress tensor must be symmetric, which means that  $\omega_{ij}$  does not contribute to it.

We might also expect the stress to include the hydrostatic pressure,  $p$ . After all, pumps move fluids around by exerting pressure on them. So, we additionally have a  $-p\delta_{ij}$  term in the stress tensor. For an isotropic viscous fluid, then, we have

$$\sigma_{ij} = -p\delta_{ij} + C_{ijkl}v_{kl}. \quad (10.26)$$

Again, we use the fact that a linear relationship between two rank 2 symmetric tensors that remains invariant under change of coordinates can be written with Lamé coefficients.

$$\sigma_{ij} = -p\delta_{ij} + \lambda v_{kk}\delta_{ij} + 2\mu v_{ij}. \quad (10.27)$$

We will define  $\eta$  and  $\eta_v$  such that  $\mu = \eta$  and  $\lambda = (\eta_v - 2\eta)/3$ . Then, we have

$$\sigma_{ij} = -p\delta_{ij} + 2\eta \left( v_{ij} - \frac{v_{kk}}{3} \delta_{ij} \right) + \frac{\eta_v}{3} v_{kk} \delta_{ij}. \quad (10.28)$$

The quantity  $\eta$  is called the **viscosity**, or shear viscosity, and  $\eta_v$  is called the bulk viscosity. It is clear that  $\eta_v$  determines the contribution of isotropic compression to the stress. For an incompressible fluid, the continuity equation (9.25) gives that  $v_{kk} = \partial_k v_k = 0$ , so the stress tensor is

$$\sigma_{ij} = -p\delta_{ij} + 2\eta v_{ij} = -p\delta_{ij} + \eta(\partial_i v_j + \partial_j v_i). \quad (10.29)$$

## 10.6 Equation of motion for an incompressible isotropic viscous fluid

Now that we have the constitutive relation, we can write down the equation of motion for an incompressible isotropic viscous fluid. This is the statement of conservation of linear momentum.

$$\frac{dv_i}{dt} = -\partial_j \sigma_{ij} = \partial_i p - \eta \partial_j \partial_j v_i, \quad (10.30)$$

This equation, together with the continuity equation,  $\partial_i v_i = 0$ , are known as the **Navier-Stokes equations**. We can nondimensionalize this equation, choosing  $x = \ell \tilde{x}$ ,  $t = \tau \tilde{t}$ ,  $v_i = U \tilde{v}_i$ , and  $p = \tilde{p} \eta U / \ell$ . Here,  $\ell$  and  $\tau$  are respectively length and time scales of interest, and  $U$  is the characteristic velocity. The resulting equation is

$$\frac{\rho \ell^2}{\eta \tau} \partial_t \tilde{v}_i + \frac{\rho U \ell}{\eta} \tilde{v}_j \partial_j \tilde{v}_i = \partial_i \tilde{p} - \partial_j \partial_j \tilde{v}_i, \quad (10.31)$$

where the derivatives are now with respect to dimensionless variables. We can collect the constants to define dimensionless parameters, the **Reynolds number**,  $\text{Re} = \rho U \ell / \eta$ , and the **Strouhal number**,  $\text{Sr} = (\ell / U) / \tau$ .

$$\text{Re} (\text{Sr} \partial_t + \partial_j \tilde{v}_j) \tilde{v}_i = \partial_i \tilde{p} - \partial_j \partial_j \tilde{v}_i. \quad (10.32)$$

The Reynolds number is the ratio of the inertial energy,  $\rho U^2 \ell^3$ , to the energy loss due to viscous dissipation,  $\eta U \ell^2$ . The Strouhal number is the ratio of the advective time scale,  $\ell / U$  to any other pertinent time scale of interest,  $\tau$ . If  $\text{Re} \ll 1$  and  $\text{Re} \text{Sr} \ll 1$ , then the left hand side of the equation of motion is negligible compared to each term in the right hand side. In cell and developmental biology, this is generally the case. To satisfy us that this is indeed the case, we can estimate the Reynolds number for processes in a developing embryo. The density of our material is close to that of water, or  $10^3 \text{ kg/m}^3$ . The smallest viscosity is that of water, which is about  $10^{-3} \text{ kg-m/s}$ . The longest length scale we generally consider in early embryos is about  $1 \text{ mm} = 10^{-3} \text{ m}$ . The fastest speeds could conceivably be that of the fastest motor proteins, about  $100 \text{ } \mu\text{m/s} = 10^{-4} \text{ m/s}$ . Putting this together gives a Reynolds number of  $\text{Re} = 0.1$ . We have intentionally vastly overestimated this, since most fluid-like embryonic movements much more slowly, over shorter distances, and with much higher viscosity. So, we are generally justified in neglecting the left hand side of the equation of motion, and we have

$$\partial_j \sigma_{ij} = 0. \quad (10.33)$$

We will talk in more depth about dynamics of isotropic incompressible viscous fluids at low Reynolds number when we study the [He, at al. paper](#). In a future lecture, we will look at complex fluid (those that are not isotropic, such as an actin cortex, which is comprised of filaments) and *active*, meaning that the material can consume energy (for example via ATP hydrolysis by motor proteins), which will use in the papers we read about polarizing the one-cell *C. elegans* embryo.